


# Gough **SnoGuards**, Inc.

4133 Du Bois Blvd., Brookfield, IL 60513 Voice: 708-485-6272 Fax 708-485-6273  
E-mail: Sales@SnoGuard.com Web: [www.SnoGuard.com](http://www.SnoGuard.com)

## Type **SGPM** - for snow retention

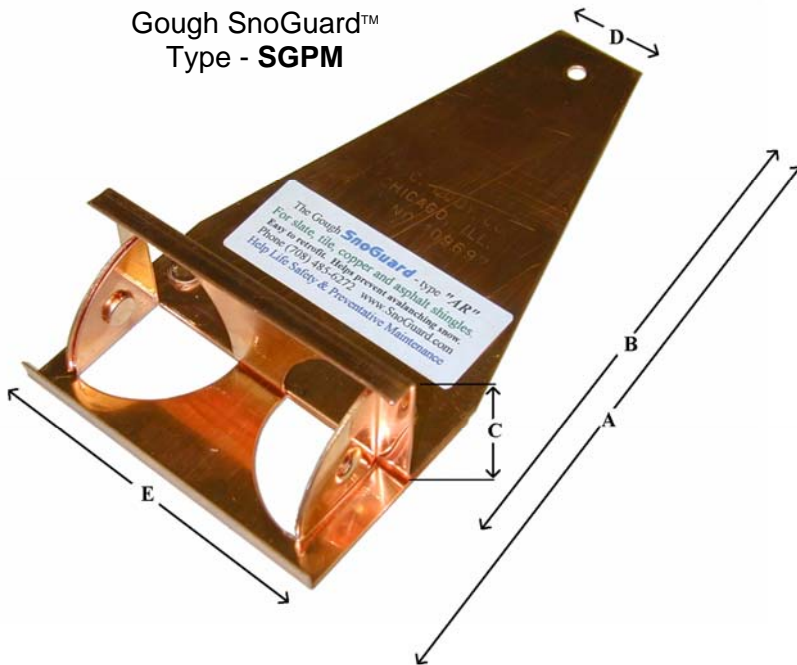

TYPICAL SIZES INDICATED ARE (+/-) 1/16" (1.6MM)

A = 6 3/8" B = 5" C = 1 1/4" D = 1" E = 3 1/4"

- METAL - Made of a powder coated, non-rusting aluminum and conforms the following specifications: ASTM B209, ASME SB209 and AMS QQ-A-250/2.
- COLORS - Powder coated colors compatible to major panel manufacturers.
- STABLE DESIGN - This classic snow guard includes two vertical pedestals each of a double thickness metal for strength, making it the most stable & strongest snow guard on the market. The wider base allows it to distribute the weight and the holding surface is almost 50% greater than others - helping retain more snow with each snow guard. The medium height minimizes pivotal rocking.
- INSTALLATION - (1) Mechanically fasten OR (2) Secure with Sure Bond 190. 15 to 20 snow guards per tube. (Full cure requires 50 degrees Fahrenheit for 30 days. Winter grade is not recommended)
- For new construction or adaptable for retrofit since 1924.
- Available in copper and other metals.
- May be customized to fit different roofing materials.
- Sample layout patterns are available.

**Note:** When specifying our snow guards on a project, please indicate: "**Gough SnoGuard**" and not just "SnoGuard". (Although we have trademarked the special spelling of "SnoGuard", it less confusing for contractors to find "Gough SnoGuard".)